

HE

**PATENT APPLICATION**

**IN THE UNITED STATES PATENT AND TRADEMARK OFFICE**

In re application of

Pascal Albert Emile LEFEBVRE, et al.

Attorney Docket Q62150

Appln. No.: 09/737,471

Group Art Unit: 2661

Confirmation No.: 9352

Examiner: Not yet assigned

Filed: December 15, 2000

For: NETWORK STATUS REPORTING METHOD AND A COMMUNICATIONS  
NETWORK

**RECEIVED**  
**MAR 23 2001**  
Technology Center 2600


**SUBMISSION OF PRIORITY DOCUMENT**

Commissioner for Patents  
Washington, D.C. 20231

Sir:

Submitted herewith is a certified copy of the priority document on which a claim to priority was made under 35 U.S.C. § 119. The Examiner is respectfully requested to acknowledge receipt of said priority document.

Respectfully submitted,

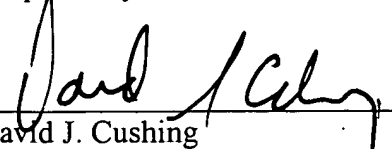  
\_\_\_\_\_  
David J. Cushing  
Registration No. 28,703

SUGHRUE, MION, ZINN,  
MACPEAK & SEAS, PLLC  
2100 Pennsylvania Avenue, N.W.  
Washington, D.C. 20037-3213  
Telephone: (202) 293-7060  
Facsimile: (202) 293-7860

Enclosures: **Certified Copy of European Patent Application No. 99403256.3**

Date: March 21, 2001


**BEST AVAILABLE COPY**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets



Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-  
gen stimmen mit der  
ursprünglich eingereichten  
Fassung der auf dem näch-  
sten Blatt bezeichneten  
europäischen Patentanmel-  
dung überein.

The attached documents  
are exact copies of the  
European patent application  
described on the following  
page, as originally filed.

Les documents fixés à  
cette attestation sont  
conformes à la version  
initialement déposée de  
la demande de brevet  
européen spécifiée à la  
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

99403256.3

**CERTIFIED COPY OF  
PRIORITY DOCUMENT**

Der Präsident des Europäischen Patentamts;  
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets  
p.o.


I.L.C. HATTEN-HECKMAN

RECEIVED

DEN HAAG, DEN  
THE HAGUE, 05/12/00  
LA HAYE, LE

MAR 23 2001

Technology Center 2600



**THIS PAGE BLANK (USPTO)**



Europäisches  
Patentamt

European  
Patent Office

Office européen  
des brevets

**Blatt 2 der Bescheinigung**  
**Sheet 2 of the certificate**  
**Page 2 de l'attestation**

Anmeldung Nr.:  
Application no.: 99403256.3  
Demande n°:

Anmeldetag:  
Date of filing: 21/12/99  
Date de dépôt:

Anmelder:  
Applicant(s):  
Demandeur(s):  
ALCATEL  
75008 Paris  
FRANCE

Bezeichnung der Erfindung:  
Title of the invention:  
Titre de l'invention:

Network status reporting method and a communications network

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:  
State:  
Pays:

Tag:  
Date:  
Date:

Aktenzeichen:  
File no.  
Numéro de dépôt:

Internationale Patentklassifikation:  
International Patent classification:  
Classification internationale des brevets:

H04L12/24, H04L12/26, H04L12/56

Am Anmeldetag benannte Vertragstaaten:  
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE  
Etats contractants désignés lors du dépôt:

Bemerkungen:  
Remarks:  
Remarques:

**THIS PAGE BLANK (USPTO)**

- 1 -

**NETWORK STATUS REPORTING METHOD AND A COMMUNICATIONS**  
**NETWORK**

5       The present invention relates to a method for network status reporting  
as described in the preamble of claim 1, the communications network as  
described in preamble of claim 2.

      Such a method and communications network are already known in  
the art, e.g. from the section Flow Control Model and Service Model for the ABR  
Service Category, pages 7-11 in *"Traffic Management Specification Version 4.0"*  
10   from the author Natalie Giroux published in April 1996 by the ATM Forum  
(ATMF) Technical Committee.

      Therein, the Available Bit Rate flow control is described. This Available  
Bit Rate flow control occurs between a data source, called a sending end-system  
and a data sink, called a receiving end-system. A data source and a data sink  
15   are connected via bi-directional connections over a communication network  
containing a number of intermediate network nodes, called network elements. In  
this Available Bit Rate flow control method, the intermediate network nodes and  
the data sink report to the data source on congestion in the communications  
network.

20       A source generates forward RM-cells, which are turned back by the  
data sink and sent back to the source as backward RM-cells. These backward  
RM-cells carry feedback information provided by the intermediate network nodes  
and the data sink, to the data source. An intermediate network node directly  
inserts feedback control information into RM-cells when they pass in the forward  
25   or backward direction and indirectly informs the data source about congestion.  
The data sink will update this congestion information in RM-cells, and generate  
backward RM-cells. The data source then adapts its traffic in accordance with the  
feedback in order to get a low cell loss ratio. Determination and reporting of

- 2 -

network congestion by each of the intermediate network nodes together with the data sink in this flow control method, leads to a very complex approach. At present the stability of this approach is not proven. Moreover, the complexity it introduces into the network is considerable. Besides, it is not possible to support  
5 this mechanism in a heterogeneous network hosting different transport technologies such as Asynchronous Transfer Mode and Frame Relay as it requires all the nodes involved, to support the ABR mechanism.

An object of the present invention is to provide a network status reporting method of the above known type and a communications network but  
10 whose implementation is less complex and which consequently can be introduced in a heterogeneous environment , like the internet.

According to the invention, this object is achieved by the method as described in claim 1, the communications network as described in claim 2, the data source as described in claim 6 and the data sink as described in claim 7.

15 In this way, by only introducing functionality in the data sink that is able to report network status information to the data source to thereby enable the data source to adapt the sending rate, and introducing functionality in the data source in order to interpret the notification and to subsequently adapt the transmission rate, the data loss rate is decreased and because only the data sink  
20 and the data source are involved, there is no additional complexity within the communications network. The intermediate network nodes are switching or routing network nodes constituting the backbone network, only participating in the method for so far that a received report is forwarded.  
Because only the edge network needs adaptation, the current invention can be  
25 implemented in any heterogeneous network, like the internet.

Other characteristic features of the present invention are described in claim 3 and claim 4.



- 3 -

The data sink may be either the line termination element of an access network, such as an ADSL (Asymmetric Digital Subscriber Line) DSLAM (Digital Subscriber Line Access Multiplexer) or the network termination element of an access network, such as an ADSL modem, within the communications network.

5 These are alternative solutions for the implementation of the data sink.

A further characteristic feature of the present invention is mentioned in the claim 5.

The network status is determined based on the current data transmission rate on the line between the line termination element and the network termination element in an access network within the communications network. In case of a rate adaptive digital subscriber line network the RADSL modem and the RADSL Digital Subscriber line Access Multiplexer (re-)negotiate an upstream and downstream data rate over the line in between. In this situation the network neighbourhood of the data sink is the ADSL line in between the ADSL modem and ADSL DSLAM. The status of this ADSL line may be the data rate. Another network status in its neighbourhood may be the quality of signal received by the data sink that may be observed by monitoring loss of frames or a bit-error rate at the data sink.

10 An alternative network status in its neighbourhood, may be the data rate in case of Inverse multiplexing for ATM wherein the data rate mainly is determined by the number of active physical interfaces grouped into one logical interface. Here the number of active physical interfaces are monitored.

Additional characteristic features of the present invention are described in claim 8 and claim 9.

25 The network status reporting method is either initiated by the data source through the requesting for a report on the network status of the communications network or initiated by the data sink by sending a report on the network status of the communications network. These are alternative solutions for

- 4 -

the triggering of the network status reporting method within the communications network. If the data source initiates the request for a report, the disadvantage is the use of network bandwidth for sending the request for a report over the path between the data source and the data sink and besides the delay of receiving the request for a report. Moreover the request may be redundant because there may not be any status change at the data sink neighbourhood. On the other hand, if the data sink initiates the status reporting method the reporting may be done only when a status change has occurred and additionally there is no superfluous bandwidth consumption.

10           The above and other objects and features of the invention will become more apparent and the invention itself will be best understood by referring to the following description of an embodiment taken in conjunction with the accompanying drawing FIG. 1 representing a communication network wherein the network status reporting feedback method of the present invention is  
15           implemented.

          In the following paragraphs, referring to the drawing, an implementation of the present invention will be described. In the first paragraph of this description, the main elements of the communications network as presented in FIG. 1 wherein the execution of the method for network status  
20           reporting, is described. This part is succeeded by a description wherein all connections between the before mentioned network elements and described components are defined. In the following paragraph the actual execution of the network status reporting is described.

          The essential elements of the communications network of the  
25           embodiment according to the present invention are at first the user terminal UT, a rate adaptive asynchronous digital subscriber line modem RADSLM, a digital subscriber line access multiplexer DSLAM, the internet network INNW and at last the internet service provider server ISPS.

- 5 -

In order to keep simplicity in this description it is chosen to describe only one user terminal UT although there is normally a plurality of user terminals present in such a communications network. In this embodiment this user terminal is a personal computer. Further, also in order to keep simplicity in this description it is chosen to only describe one rate adaptive asymmetrical digital subscriber line modem RADSLM that handles the conversion of the rate adaptive asymmetrical digital subscriber line-signal, the rate adaptive asymmetrical digital subscriber line further referred to as RADSL, into a format accessible for the present user terminal UT. The rate adaptive asymmetrical digital subscriber line modem RADSLM is able to detect the influence of environmental factors such as weather conditions and radio frequency interference, on the signal-quality on the line between the rate adaptive asymmetrical digital subscriber line modem RADSLM and the a digital subscriber line access multiplexer DSLAM. In reaction on a quality of signal change the rate adaptive asymmetrical digital subscriber line modem RADSLM may start a re-negotiation with the adjacent digital subscriber line access multiplexer DSLAM in order to change the data rate on the meant ADSL-line.

The digital subscriber line access multiplexer DSLAM present, handles the linking of many customer Rate adaptive asymmetrical digital subscriber line connections to a single Internet protocol link and vice versa. It participates, as mentioned before, in the re-negotiating a data rate between the digital subscriber line access multiplexer DSLAM and the rate adaptive asymmetrical digital subscriber line modem RADSLM. The internet protocol is further referred to as IP.

Further there is an internet network INNW present containing a number of intermediate network nodes, that are not presented in FIG. 1. These intermediate network nodes are constituted by either routing or switching network elements.

- 6 -

Still there is an internet service provider server ISPS, which is a network element at the service provider premises and is able to send data with an adaptable data transmission rate towards a requesting user.

5 The internet service provider server ISPS is coupled to the internet network INNW via an IP-link. Further the intermediate network nodes are all interconnected via IP-links. The digital subscriber line access multiplexer DSLAM is also coupled via an IP-link to the internet network INNW and the digital subscriber line access multiplexer DSLAM is coupled via a common known PSTN twisted pair copper wire to the RADSL modem and the user terminal is coupled to  
10 the RADSL modem.

In order to explain the operation of the present invention it is assumed that the internet service provider server sends data via the internet network INNW and the digital subscriber line access multiplexer DSLAM towards the rate adaptive asymmetrical digital subscriber line modem RADSLM that hands over  
15 the data to the user at the personal computer UT. This data transmission is performed at a certain data rate.

Later, at a certain point of time, the weather conditions get worse, hence also the quality of signal on the ADSL-line decreases. As a result the rate adaptive asymmetrical digital subscriber line modem RADSLM and the digital  
20 subscriber line access multiplexer DSLAM re-negotiate another, lower transmission rate on the ADSL-line. If the internet service provider server ISPS continues transmitting data at the same rate there may be loss of data because of the reduced transmission rate at the ADSL-line. To avoid this situation, the rate adaptive asymmetrical digital subscriber line modem RADSLM sends a report  
25 towards the internet provider service server ISPS over the internet network INNW. The intermediate network nodes of the internet network forward this report according to well-known IP routing techniques. At reception of the meant report

- 7 -

by the internet service provider server ISPS this server adapts its transmission rate based on the current transmission rate indicated by the received report.

It is to be remarked that in another embodiment, the initiative for reporting may be undertaken by the digital subscriber line access multiplexer

5 DSLAM instead of the rate adaptive digital subscriber line modem RADSLM.

A further remarked is that instead of the data sink, the digital subscriber line access multiplexer also may apply the network status reporting to the data source.

A subsequent remark is that the network status reporting also may be  
10 applied in other rate adaptive networks but also in completely different networks than the in this embodiment described ADSL access network, such as a mobile network like Global System for Mobile communication, further referred to as GSM, wherein the network status may be the data rate on the mobile link between a GSM terminal and an "adjacent" base station. The network status  
15 here, may be determined by the data sink which in this situation may be the mentioned "adjacent" base station or even the GSM terminal itself.

The present invention may also be applicable within a satellite communications network and the adjacent terrestrial network.

Although the above embodiments of the invention have been  
20 described by means of functional blocks, their detailed realisation based on their functional description should be obvious for a person skilled in the art and is therefore not described.

While the principles of the invention have been described above in connection with specific apparatus, it is to be clearly understood that this  
25 description is made only by way of example and not as a limitation on the scope of the invention, as defined in the appended claims.

**THIS PAGE BLANK (USPTO)**

- 8 -

**CLAIMS**

1. Network status reporting method, for reporting in a communications network a network status to a data source (DSRC) with an adaptive transmission rate in order to enable said data source (DSRC) to adapt said transmission rate based on said network status, said communications network further containing at least one intermediate network node (INN), and a data sink (DSNK), **CHARACTERISED IN THAT** only said data sink (DSNK) reports to said data source (DSRC) on a status of said communications network in its neighbourhood, and no intermediate network node (INN) reports to said data source (DSRC) on said network status of said communications network.
2. Communications network comprising at least one data source (DSRC) with an adaptive transmission rate, at least one intermediate node and at least one data sink (DSNK), said data source (DSRC) being able to adapt said transmission rate on the basis of network status information, **CHARACTERISED IN THAT** only said data sink (DSNK) is able to report said network status information of said communications network in its neighbourhood to said data source (DSRC) and no intermediate node is able to report network status information to said data source (DSRC).
3. Communications network, according to claim 2, **CHARACTERISED IN THAT** said data sink (DCSNK) is a line termination in an access network of said communications network.
4. Communications network, according to claim 2, **CHARACTERISED IN THAT** said data sink (DCSNK) is a network termination in

- 9 -

an access network of said communications network.

5           **5.** Communications network, according to claim 3 or claim 4,  
**CHARACTERISED IN THAT** said network status is a capacity of a link between  
a network termination and a line termination in said access network of said  
communications network.

10           **6.** Data source (DSRC) adapted to be used in the communications  
network according to claim 2.

**7.** Data sink (DSNK) adapted to be used in the communications  
network according to claim 2.

15           **8.** Data source (DCSRC) according to claim 6, **CHARACTERISED IN**  
**THAT** said data-source (CSRC) is adapted to request said data sink (DSNK) to  
report to said data source (DCSRC) on said network status of said  
communications network.

20           **9.** Data sink (DSNK) according to claim 7, **CHARACTERISED IN**  
**THAT** said data sink (DSNK) is adapted to regularly report to said data source  
(DSRC) on said network status of said communications network.

25



- 10 -

**ABSTRACT****NETWORK STATUS REPORTING METHOD AND A COMMUNICATIONS  
NETWORK**

The present invention relates to a network status reporting method, for  
5 reporting in a communications network a network status to a data source with an  
adaptive transmission rate. The data sink reports the network status to the data  
source in order to enable the data source to adapt the transmission rate based  
on the network status. The communications network further contains at least one  
intermediate network node, and a data sink. Only the data sink reports to the  
10 data source on a status of the communications network in its neighbourhood,  
and no intermediate network node reports to the data source on said network  
status of the communications network.

**THIS PAGE BLANK (USPTO)**

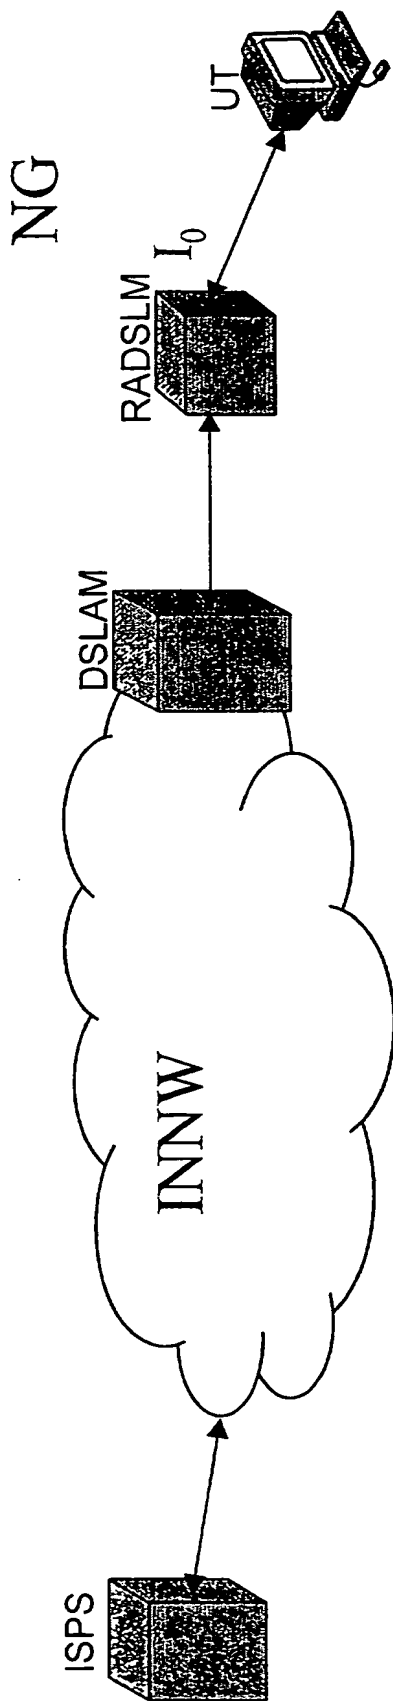


FIG. 1

**THIS PAGE BLANK (USPTO)**